

Direct Roving For PA Fabrics

ECT 4301R–2400

Identification

Example : ECT 4301R–2400

Glass type : ECT

Sizing code : 4301R

Roving density(tex) : 2400



Product Description

For PA fabrics, meet requirements for fabrics processing and mechanical properties.
 NPE free

Product Benefits

- Stable roving density
- Good use of technology
- Good integrity
- Good dispersion
- Low fuzz
- Good compatibility with resin

Technical Characteristics

Sizing type	Filament Diameter (μm)	Tensile strength (N/Tex)	LOI (%)	Roving Density tex(g/km)
--	ISO1888	ISO3341	ISO1887	ISO1889
Silane	±1	≥0.25N/Tex	0.2±0.1	±5%


Product code	Glass Type	Filament diameter[μm]	Roving Density tex(g/km)
ECT4301R	ECT	17	2400

Note : Please contact us if you have special requirements.

Packing

Rovings Weight(kg)	Rovings size(mm)			Pallet Dimensions L x W x H (mm)	Net Weight approx. (Kg)	Rovings per Pallet
	External Dia.	Inter Dia.	Height			
15-18				1140*1140*940	48	720-864
	280	152/162	260	1140*1140*1200	64	960-1152

Pallets illustration

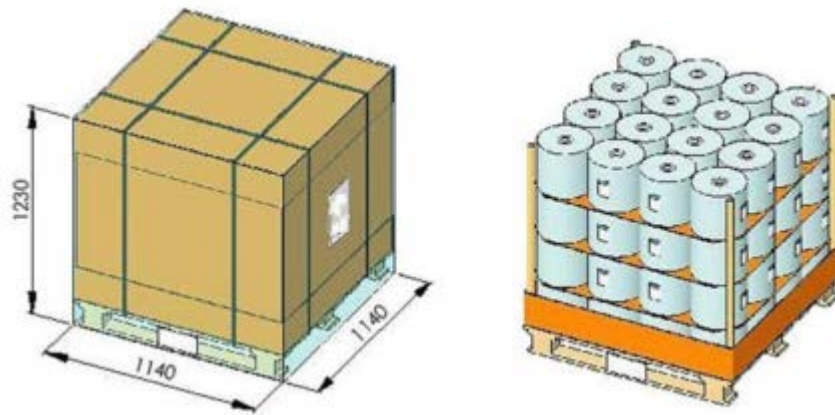

Note: Products can be packed according to the customer's request.

Storage

If there is no special requirements, goods should be stored in dry and cool place. Do not open the package before using in order to prevent absorbing moisture.



FIBERGLASS